


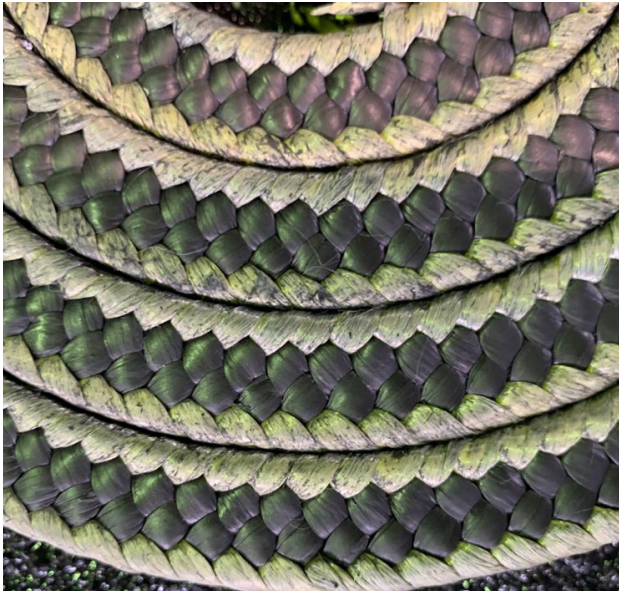

AIGI HIGH QUALITY PACKINGS

Super Severe Slurry Packing

93K

DATA SHEET

Properties Value

Color	Black/Yellow
Temperature	260°C (500 F)
PH Range	PH 3-13
Max. Liner speed	12 m/s (3600 Ft/ min)
Pressure	25Kg/cm2 (400 PSI / 28 Bar)

Service Media & Conditions

Ash Slurry, Mineral Slurry, Bauxite Slurry, Bottom Ash Slurry, Fly Ash, Dirty water and other aggressive slurry applications

Application

Wide range for slurry sealing applications: Pumps, mixers, refiners, Valves, Agitators and other rotating equipment.

SSSP93K comes in all cross-sections (size) and 5 pound and 10 pound boxes



SSSP93K Multi-Service packing is a combination of heat dissipating PTFE/ Graphite yarn and high strength lubricated Aramid yarn. The PTFE/ Graphite yarn provides excellent conformability to the shaft and stuffing box bore which results in excellent leakage performance and sealability while the Aramid reinforced corners provide resistance to extrusion. The combination of the two unique yarns makes SSSP93K an optimal choice for the most aggressive abrasion and slurry applications in mining, power plants, waste water, steel and other metals processing industries

**AIGI ENVIRONMENTAL INCORPORATED**

A Subsidiary of AIGI Group

www.aigienvironmental.com**You Tube**

To visit our channel go to :
<http://youtube.com/Aigienvironmental1996>

Distributed by :

Sizonke Trading
Quality Engineering Solutions & Supplies
Web: www.sizonkegroup.co.za