




AIGI HIGH QUALITY PACKINGS

AIGI 21 (Carbon Fiber Packing)

DATA SHEET

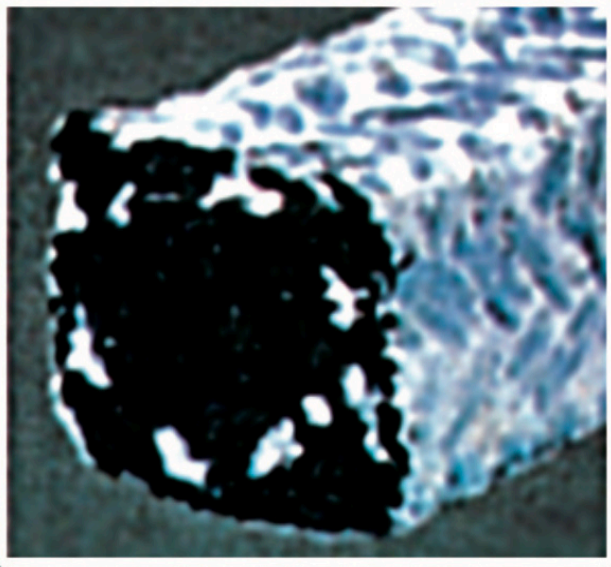

Properties Value

Color	Black
Temperature	240°C
PH Range	PH 1-14
Max. Liner speed	15 m/s
Pressure	200Kg/cm2 (3000 PSI)


Service Media & Conditions

Pumps and valves against steam, water, solvents, acids and alkalies

Application

Wide range for general sealing applications: Pumps, mixers, refiners, Valves, Agitators and other rotating equipment.

AIGI21 comes in all cross-sections (size) and 5 pound and 10 pound boxes

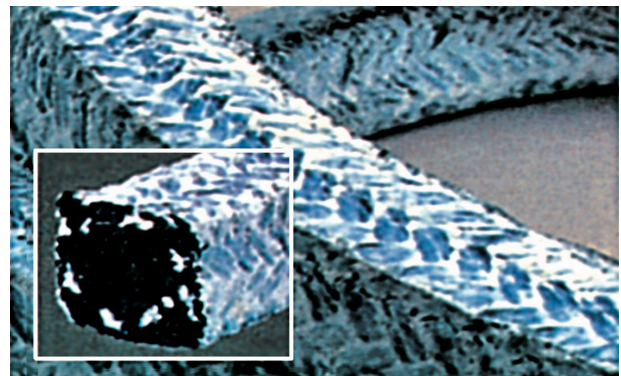

AIGI 21 is a low modulus, continuous filament high-carbon fiber packing which is doubly impregnated PTFE lubricant. AIGI 21 has a unique inorganic blocking agent and corrosion inhibitor which prevents stem pitting and stops gas/liquid penetration. It is specially designed to be used in pumps and valves against water, oil, steam, solvent, acid and alkali media

Pulp and Paper as bull rings with AIGI28



AIGI ENVIRONMENTAL INCORPORATED

A Subsidiary of AIGI Group

www.aigienvironmental.com



You Tube

To visit our channel go to :
<http://youtube.com/Aigienvironmental1996>

Distributed by :

Sizonke Trading
Quality Engineering Solutions & Supplies
Web: www.sizonkegroup.co.za